

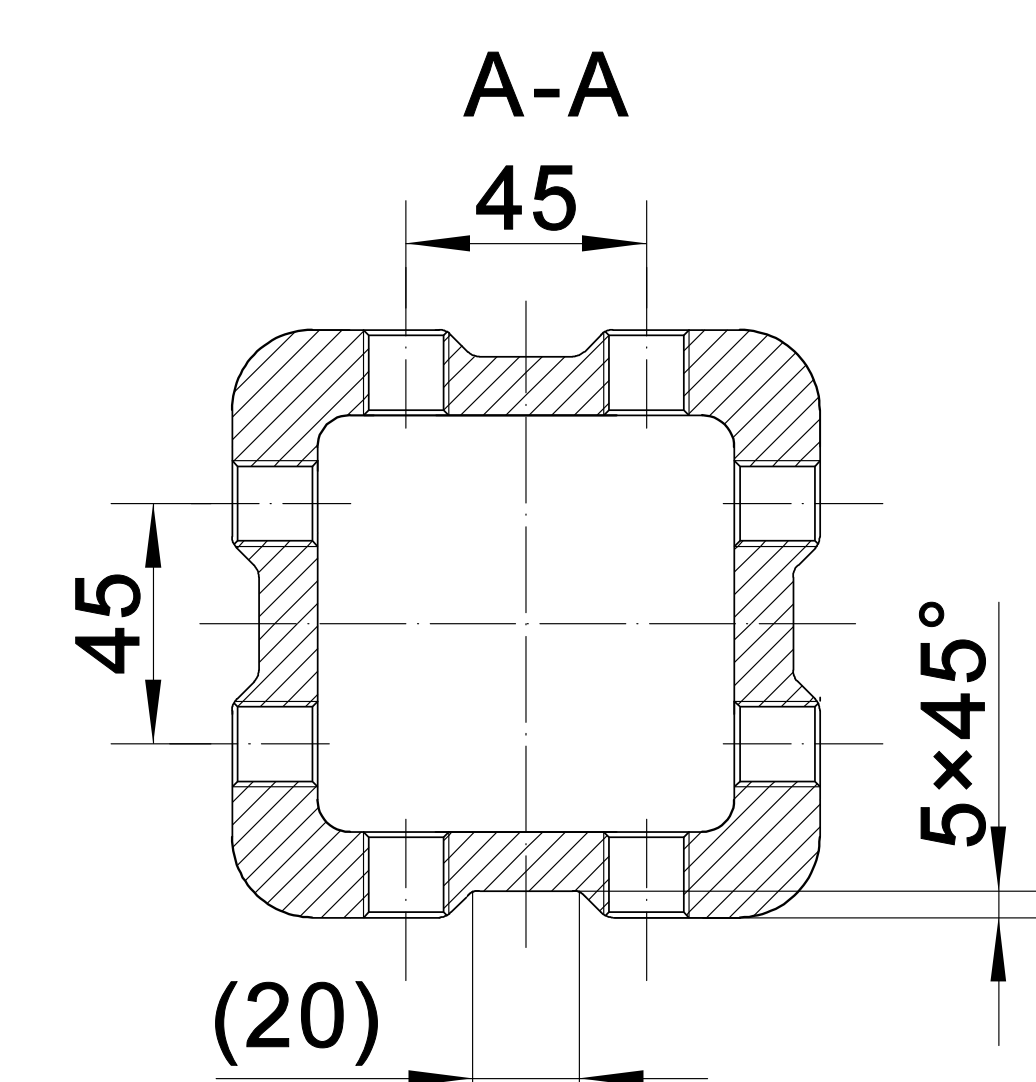
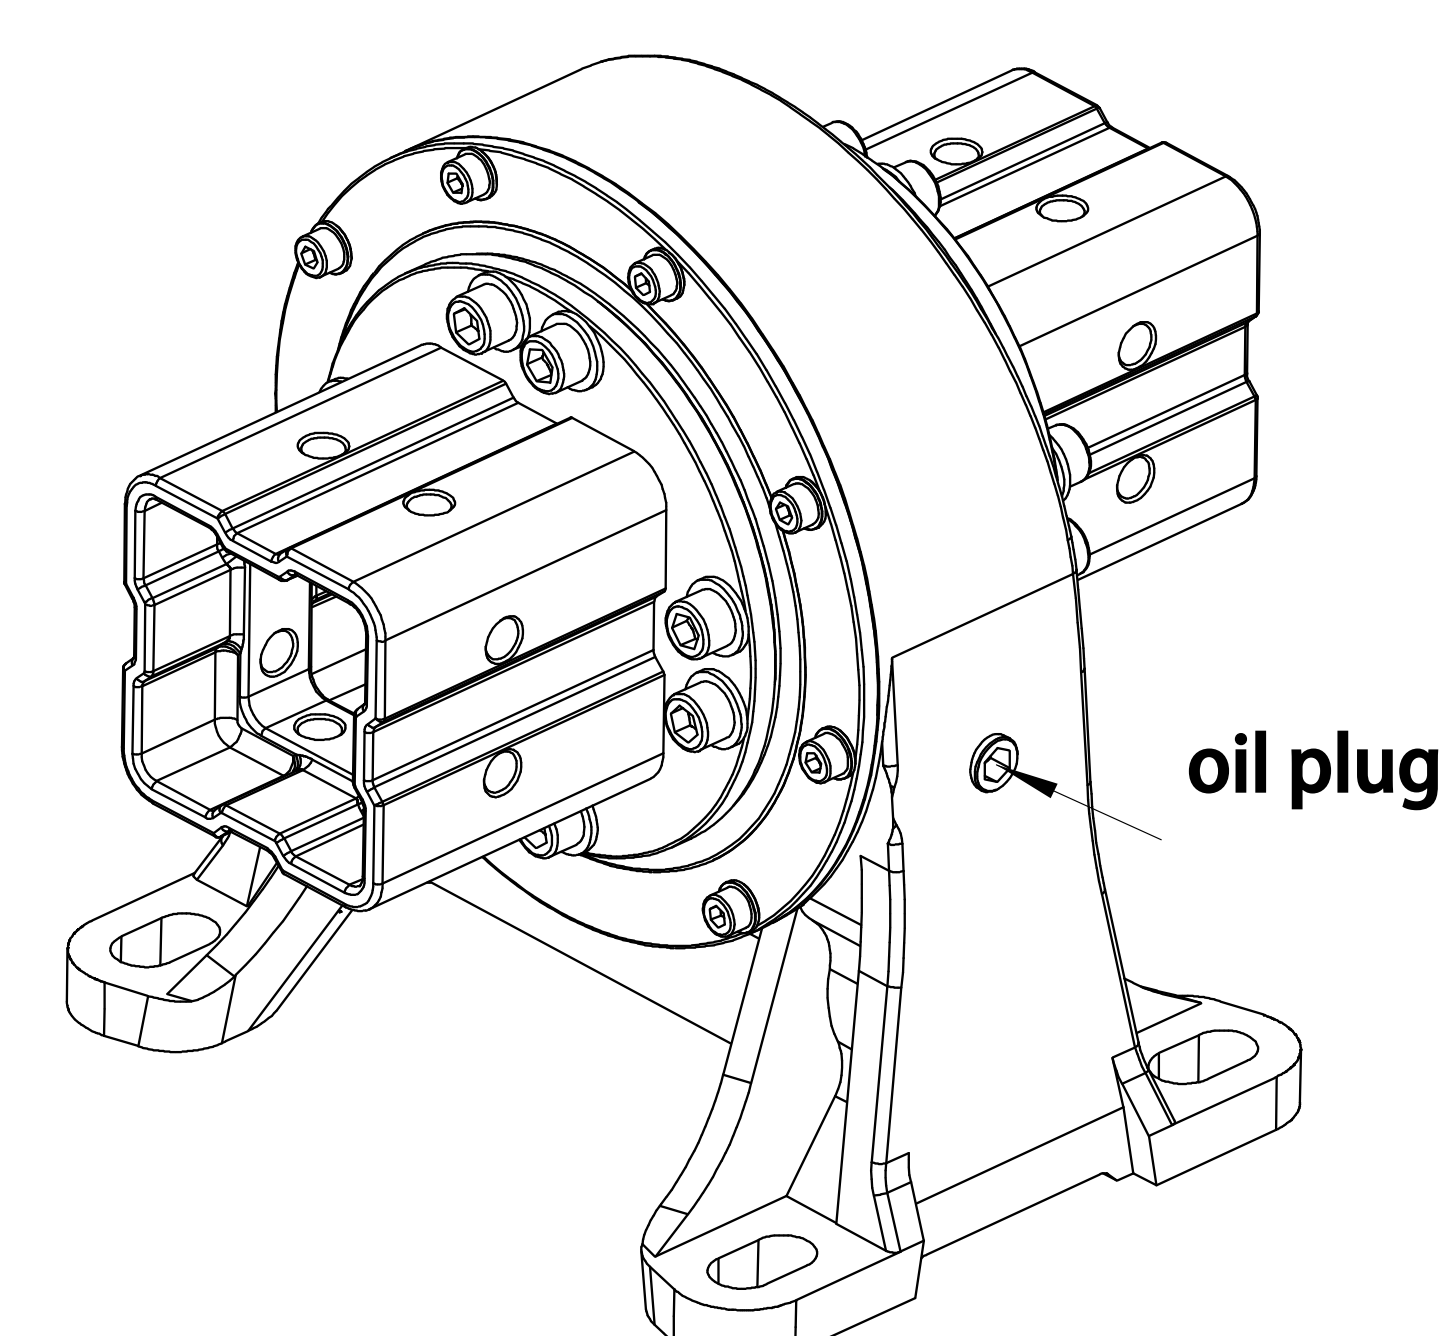
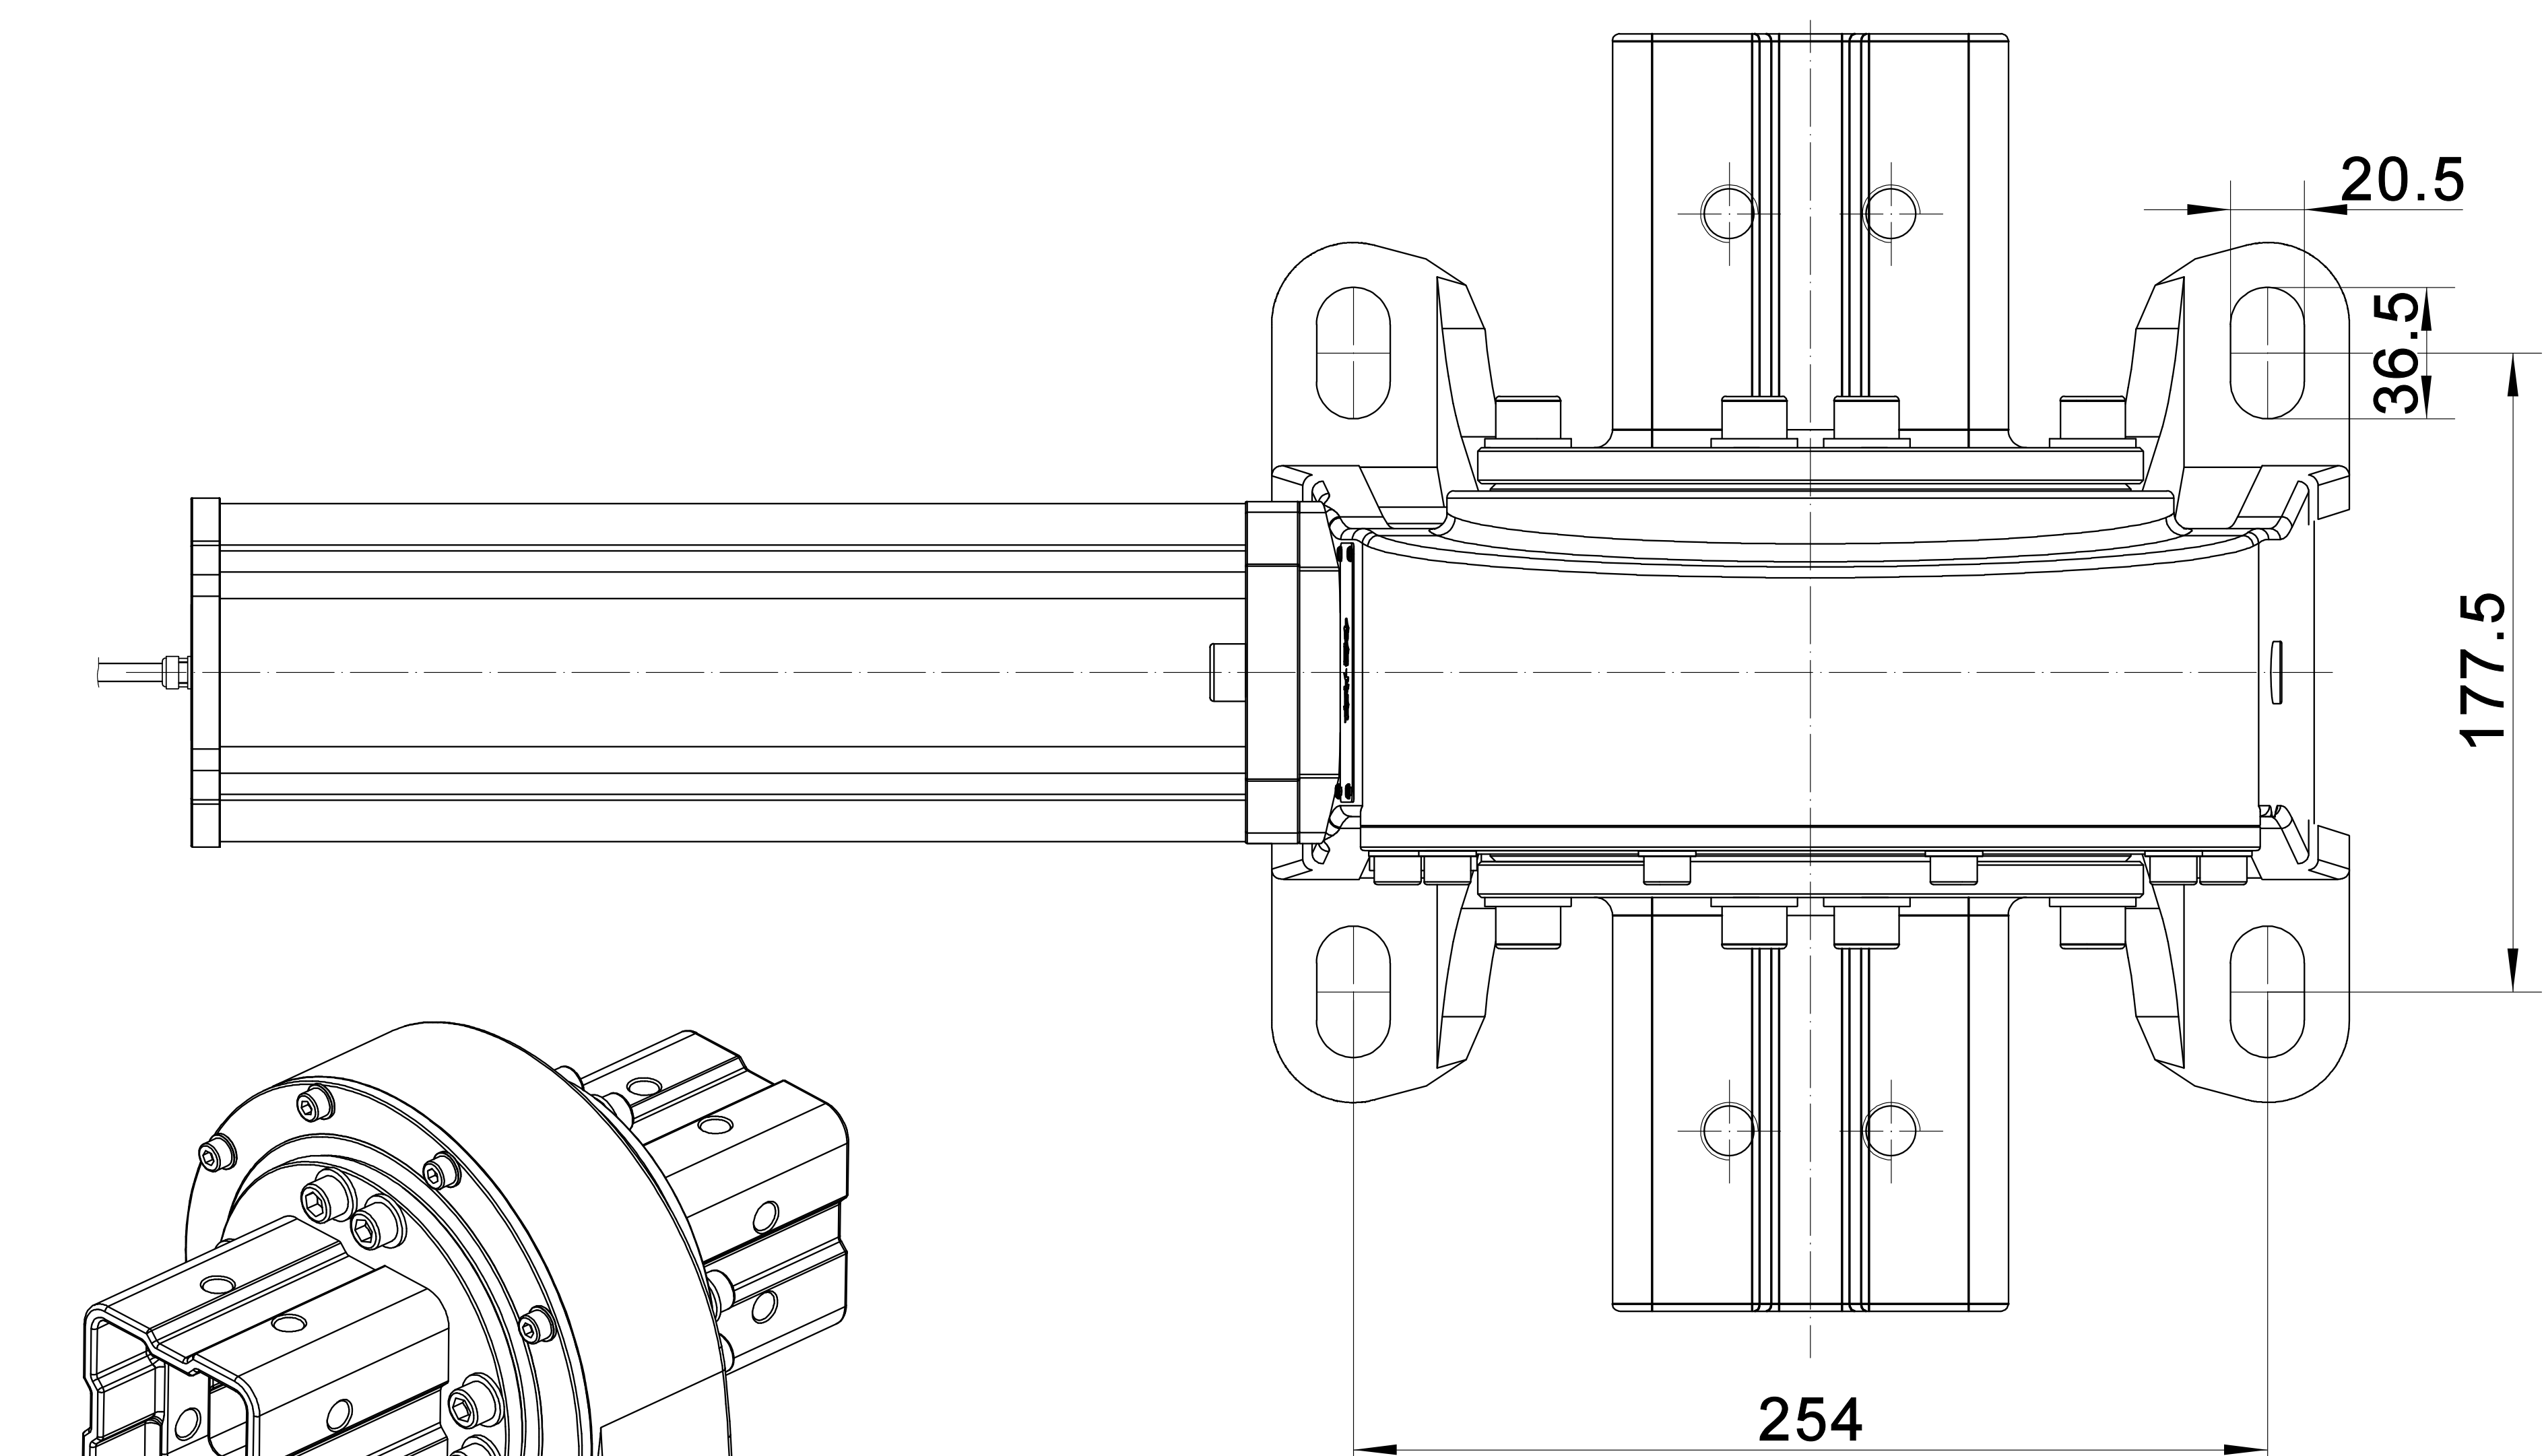
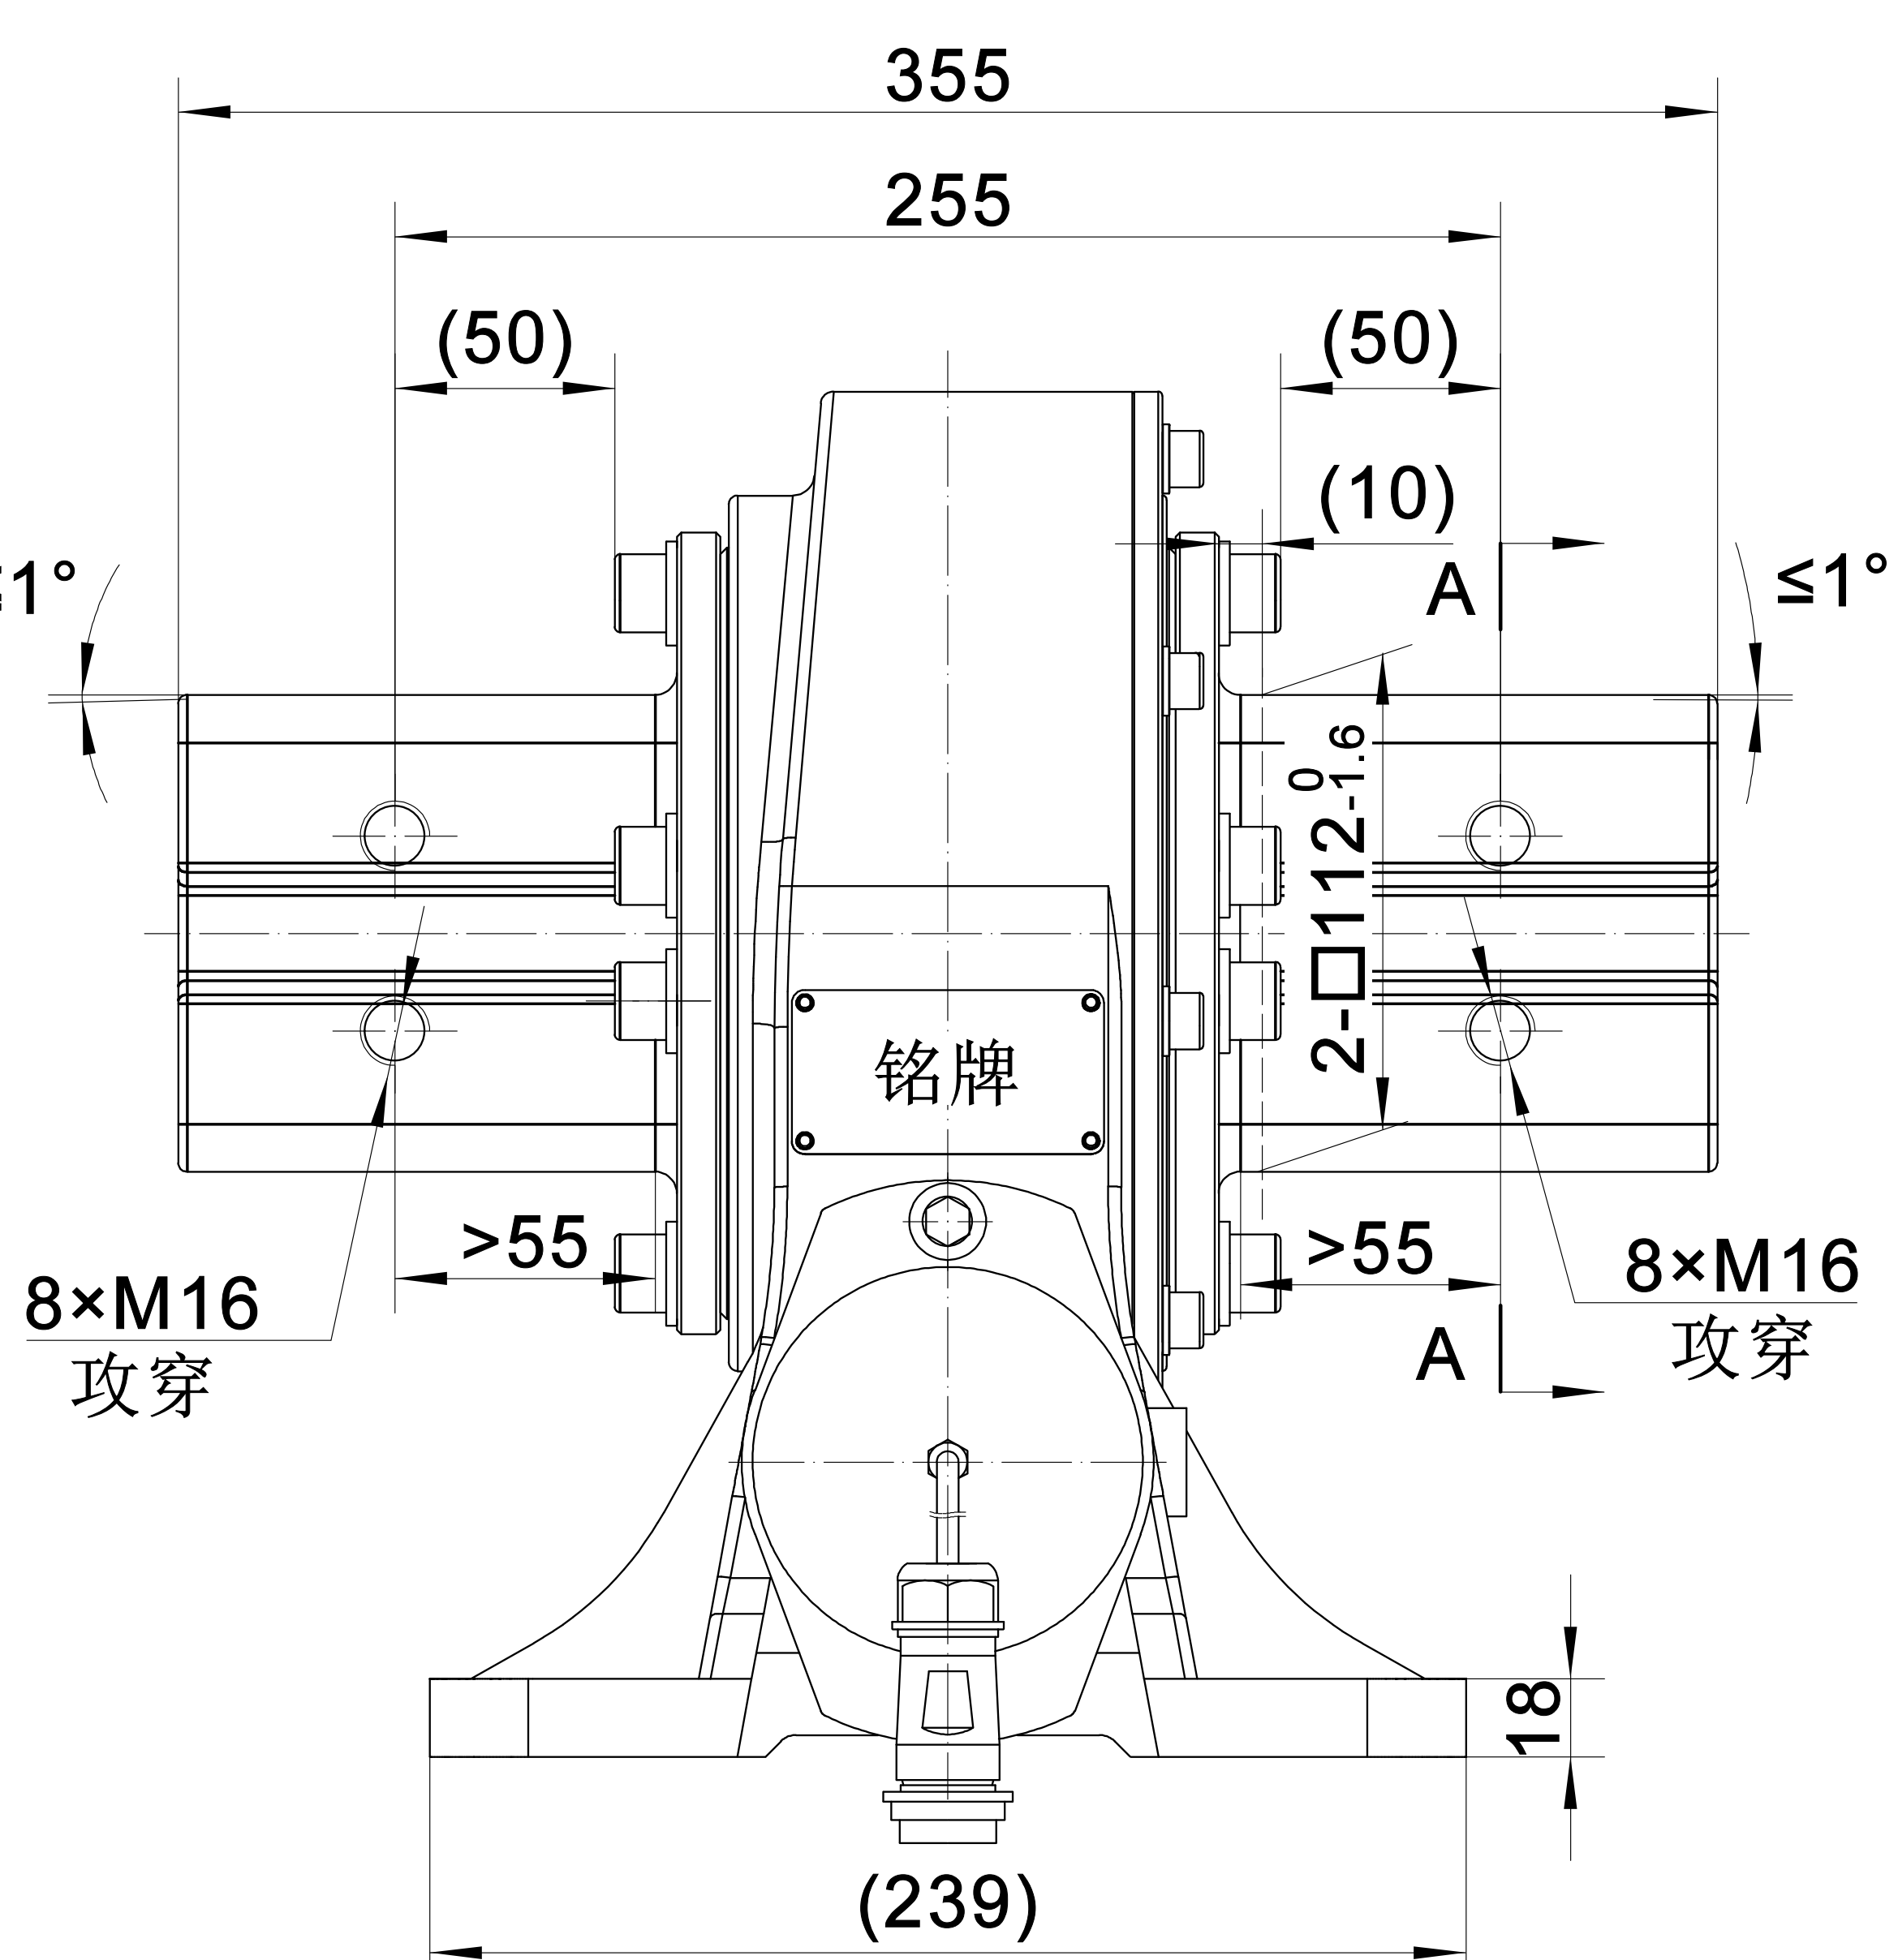


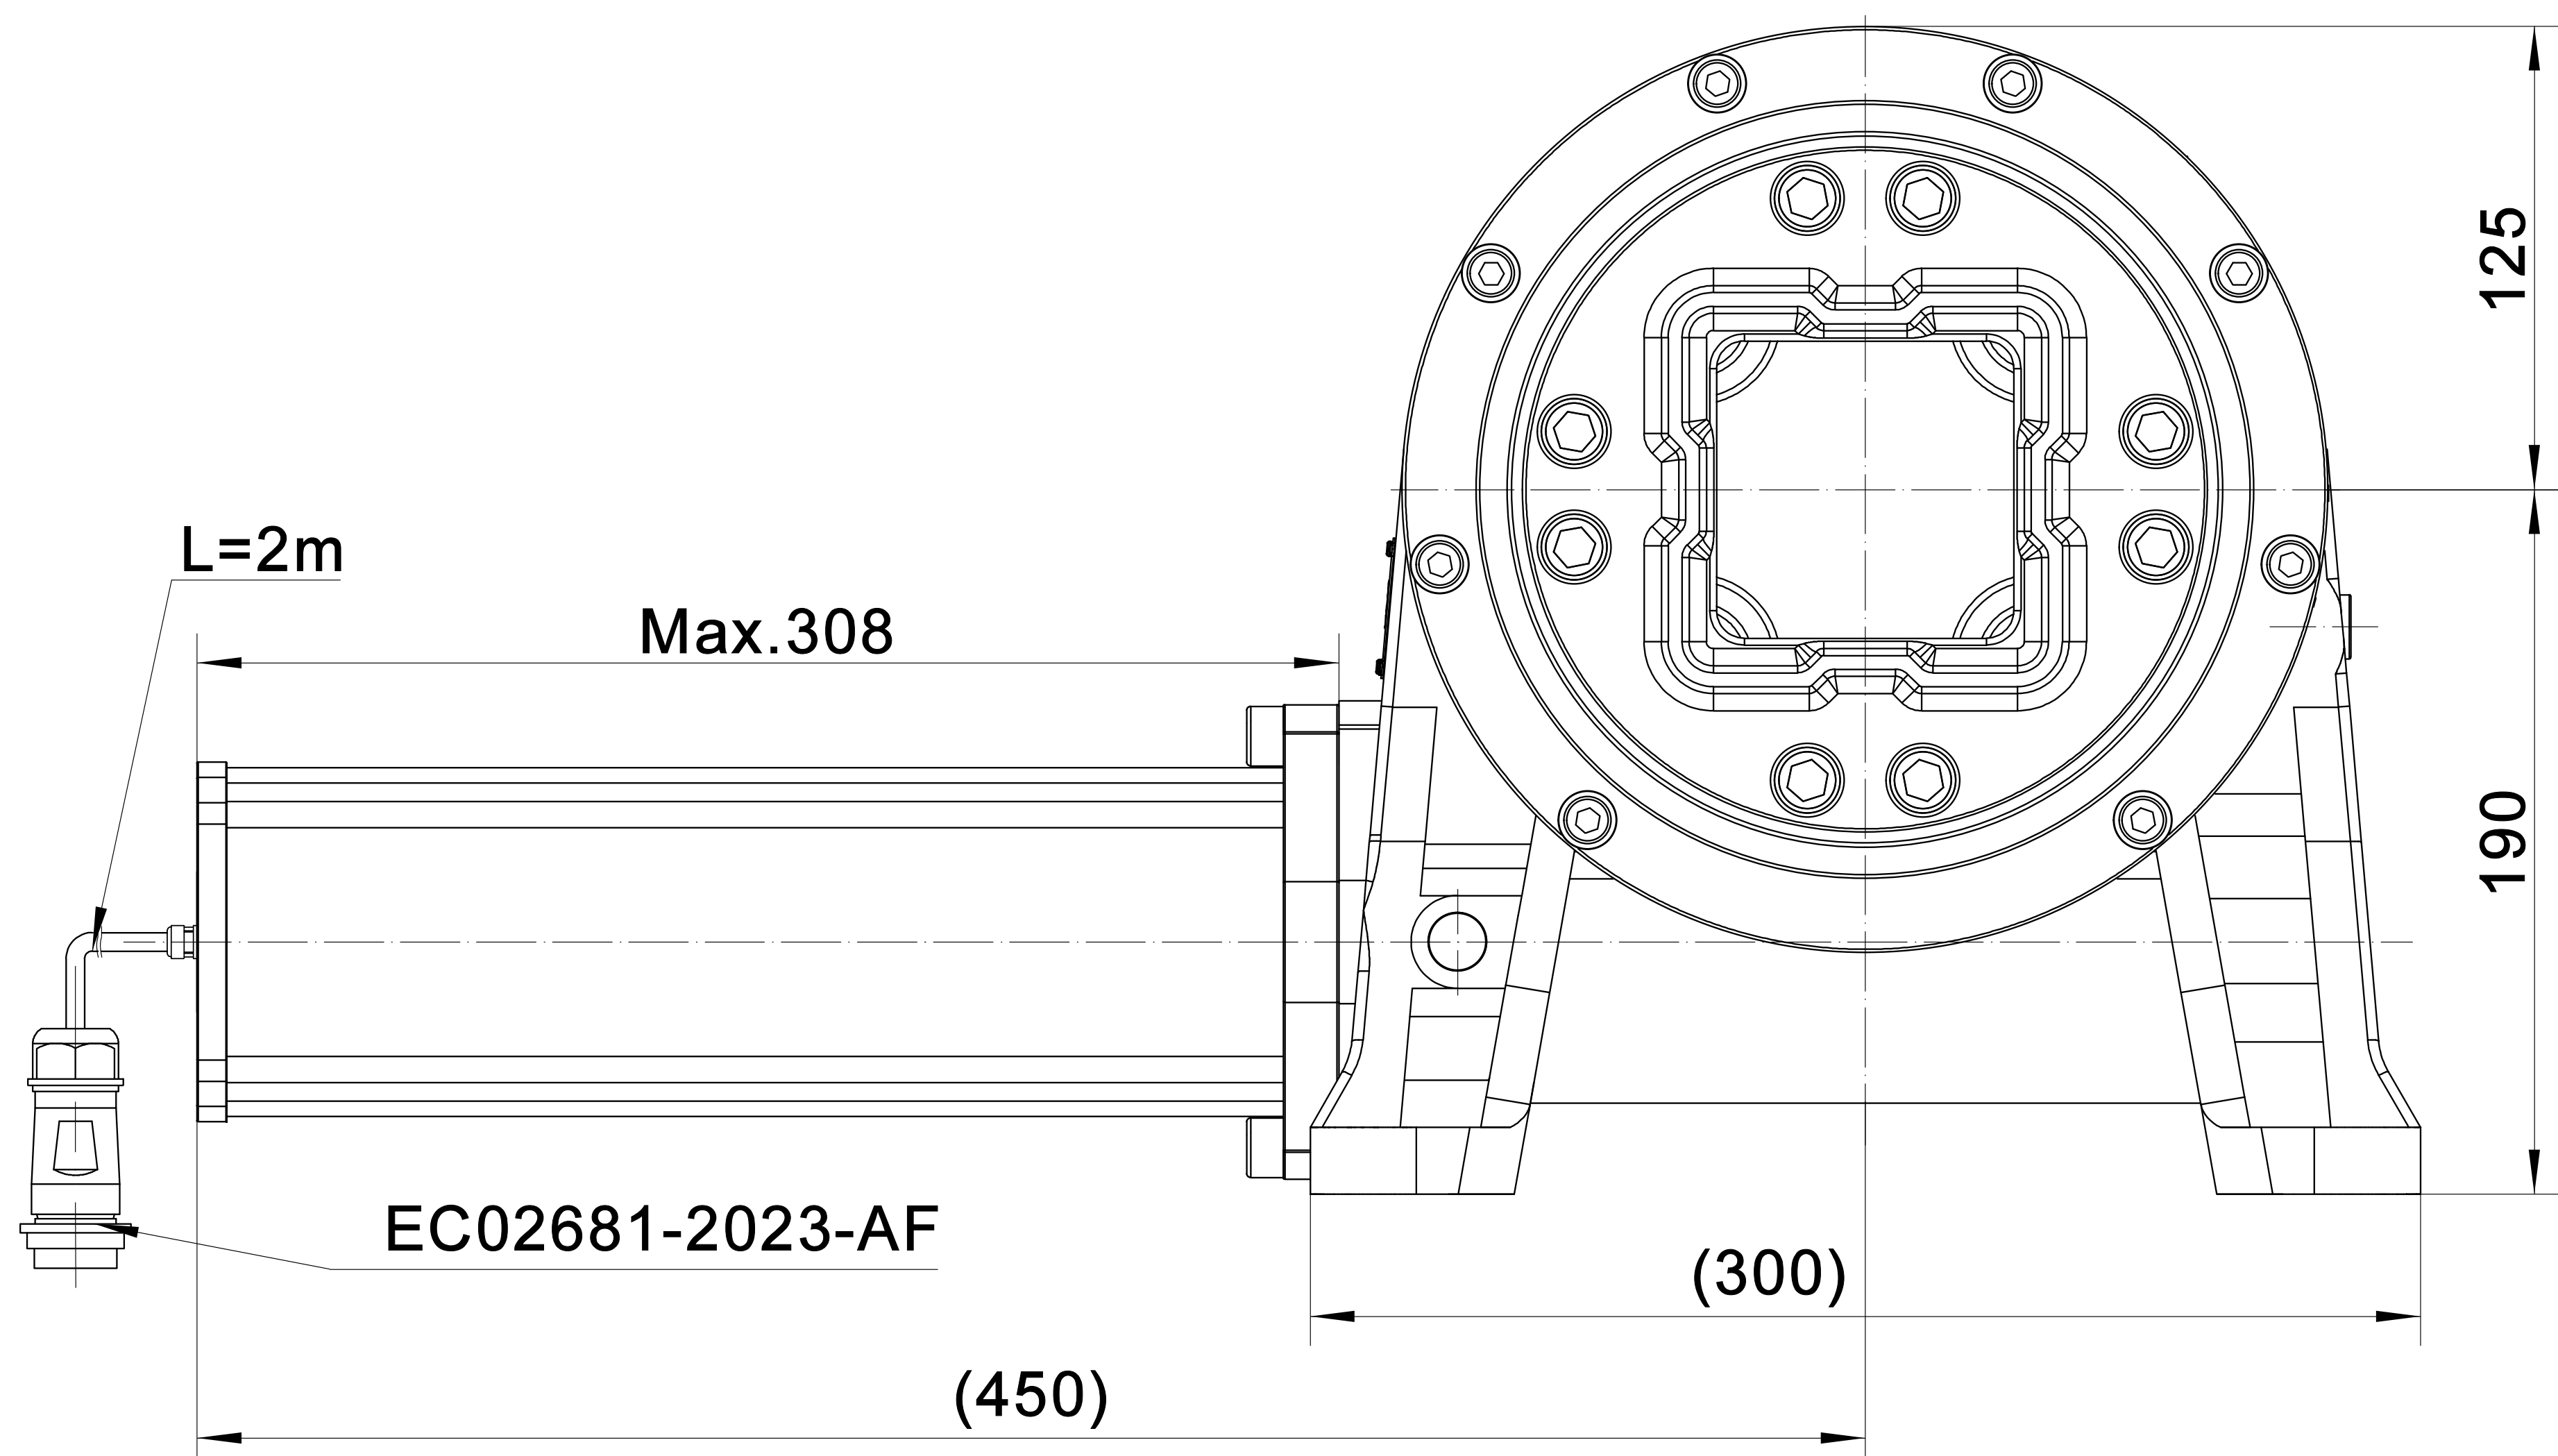

Slew Driver Performance Parameter	
Axial Static Load	25KN
Radial Static Load	90KN
Upsetting moment	8KN.m
Holding moment	39KN.m
Reduction ratio	60:1
Level of Protection	IP65
Hard Limit	±65°±3°
Precision	≤0.2°
Temperature	-20 °C~ +60°C
Anti-corroton Grade	C3
Efficiency	35%±3%
Self-locking	Yes
直流有刷行星减速电机（SH001）	
Rated Voltage	24 VDC
Rated current	<6.5 A
Noise	≤65 dB
Level of Protection	IP65
Temperature	-20°C ~ +60°C
Output Performance Parameter	
Rated output torque	6300 N.m
Max output torque	9450 N.m
Output speed	0.025 rpm

Connecting

Pin 1 motor -
Pin 2 motor +

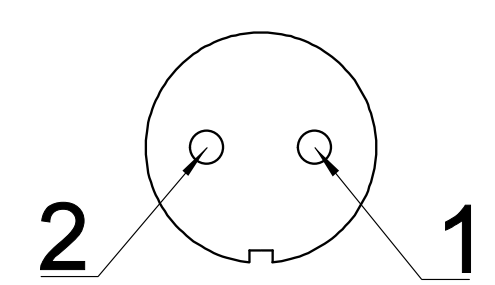

版本	修订者	日期	描述			
设计	CK	2023.3.22	Slew Driver			
审核	XYB	2023.3.22				
批准	HXL	2023.3.22				
图纸上所有信息未经允许不得擅自改动,更不能提供给他人,制造,装配,检验必须严格以该图为依据执行.			重量	比例	回转减速器	
				1:3.5		
视图标准			图幅	A4	GS60-E001T-001A-Q01	
			页码	1/1		
					版本	A